

AV-534 Stainless Steel Street Elbow, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

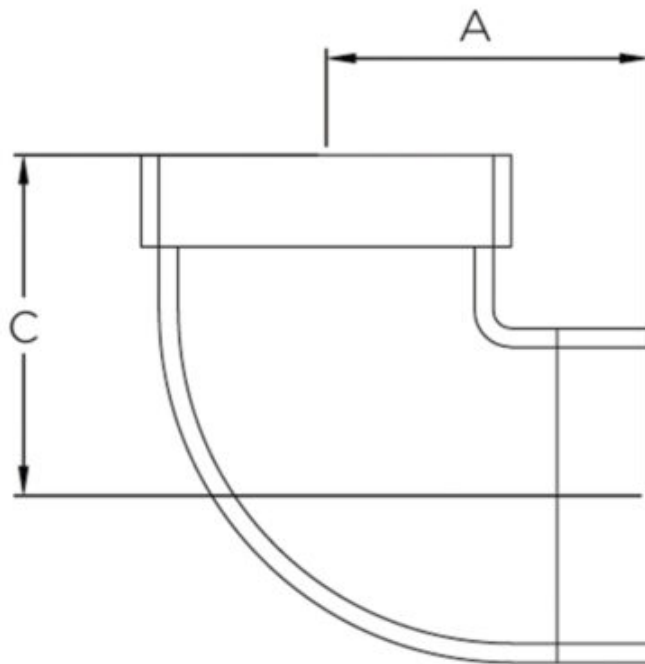

Dimensional Data

Size	A	C
1/4"	19	27
3/8"	23	29
1/2"	27	35
3/4"	32	40
1"	38	46
1.1/4"	45	54
1.1/2"	48	57
2"	57	70



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	A	C
2.1/2"	83	72
3"	94	78
4"	115	97