

AV-544 Stainless Steel Square Plug / Dummy, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

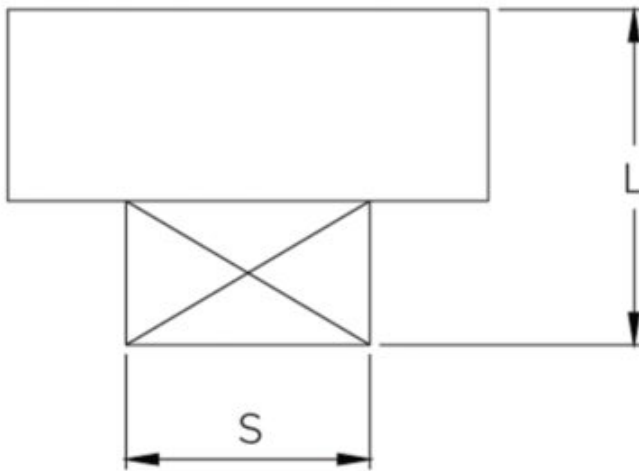

Dimensional Data

Size	L	S
1/4"	20	8
3/8"	20	8
1/2"	25	13
3/4"	27	16
1"	27	19
1.1/4"	35	22
1.1/2"	35	25
2"	40	29



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	L	S
2.1/2"	42	40
3"	45	44
4"	52	59