

## AV-532 Stainless Steel Hex Nut, PN-25


### Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

### Notes

Also available in CF8M (SS 316)

### Suitability

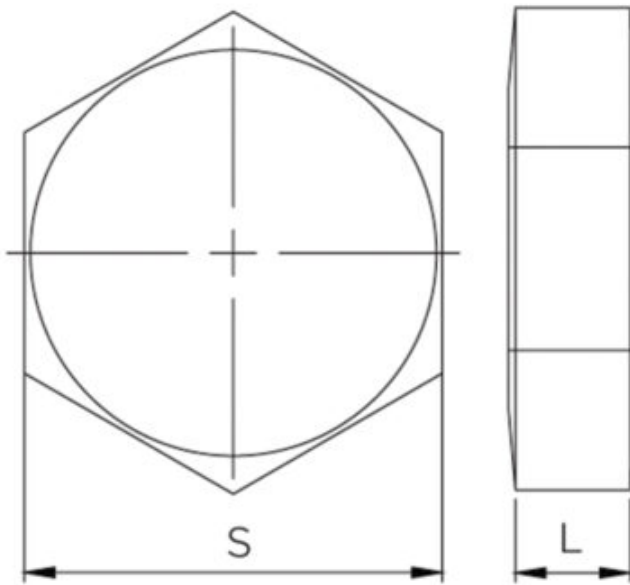

### Dimensional Data

Size	L	S
1/4"	8.5	22
3/8"	9	27
1/2"	9	32
3/4"	10	36
1"	11	46
1.1/4"	12	55
1.1/2"	13	60
2"	14	75



Manufacturers & Exporters of  
Valves, Fittings & Boiler Mountings

Size	L	S
2.1/2"	17.5	90
3"	21	100
4"	22	130