

AV-547 Stainless Steel Coupling, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

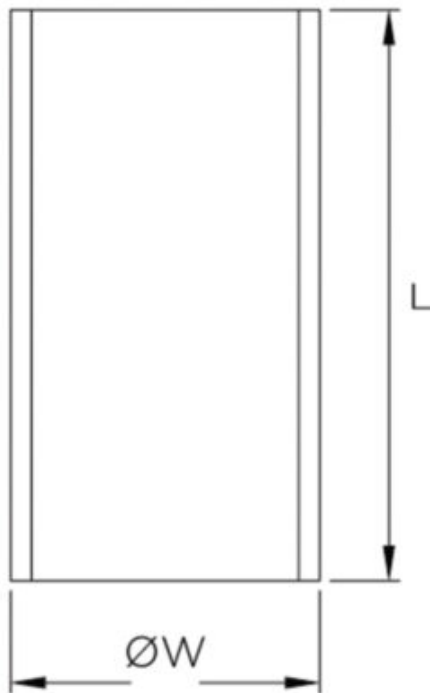

Dimensional Data

Size	L	W
1/4"	25	18
3/8"	25	21
1/2"	33	26
3/4"	35	32
1"	42	40
1-1/4"	46	47
1-1/2"	46	54
2"	55	66



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	L	W
2.1/2"	65	82
3"	71	95
4"	83	122