


IC-34 Investment Casting Stainless Steel (CF8) Union Cover Horizontal Lift Check Valve No.9,

Screwed Ends, PN-25 

Features

| | |
|----------------------------|--|
| Pressure / Class Rating | PN-25 |
| Body Material Cum Standard | Cast Stainless Steel (ASTM A351 Gr. CF8) |
| Product Description | Union Cover |
| Type of Seat | Integral Seat |
| Type of Disc | Renewable Guided Disc |
| Trim | Stainless Steel (Type 304) |
| End Details | Screwed Female BSP Parallel Threads (BS-21) |
| Test Pressure | Body: 545 Psig (Hyd.), Seat: 400 Psig (Hyd.) |
| Application Medium | Food Processing |

Notes


Also available in CF8M (SS 316)
Other screwed end specifications can be provided on request.

Suitability

Water, Steam, Oil

Material Combination

| S.No | Description | No. | Material |
|------|---------------|-----|----------------------|
| 1 | Body | 1 | Cast Stainless Steel |
| 2 | Disc (Guided) | 1 | Stainless Steel |
| 3 | Gasket | 1 | PTFE |
| 4 | Union Cover | 1 | Cast Stainless Steel |

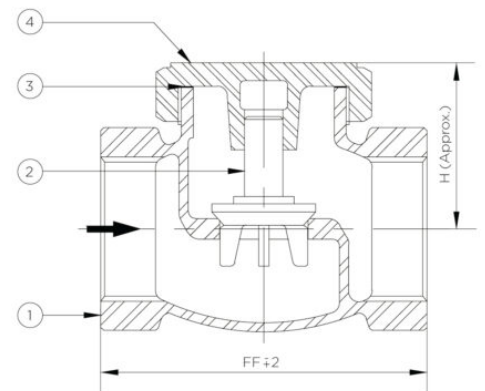

Dimensional Data

| Size (mm) | Size (inches) | FF | H |
|-----------|---------------|-----|----|
| 15 | 1/2" | 70 | 45 |
| 20 | 3/4" | 85 | 55 |
| 25 | 1" | 95 | 65 |
| 32 | 1.1/4" | 110 | 70 |
| 40 | 1.1/2" | 118 | 75 |
| 50 | 2" | 145 | 90 |