

## FV-515 Investment Casting Carbon Steel (WCB) Ball Valve, Screwed Ends, Class-800

### Features

Product Standard	BS EN 17292
Pressure / Class Rating	Class-800
Body Material Cum Standard	Cast Carbon Steel (ASTM A216 Gr. WCB)
Port Opening	Full Bore
Product Description	Three Piece Design, Lever Operated (Blow Out Proof Stem)
Type of Seat	Renewable Seat
Trim	Ball & Stem: Stainless Steel (AISI 304), PTFE Seats
End Details	Screwed Female BSP Parallel Threads (BS-21), Socket Welded Ends as per ASME B16.11
Test Pressure	Body: 178 Bar (Hyd.), Seat: 76 Bar (Hyd.), Seat: 7 Bar (Air)



### Notes


Suitable for steam service with specialized PTFE.  
Can be provided with Glass Filled PTFE, Graphite Blended PTFE & PEEK Seats on request.  
Other screwed end specifications can be provided on request.

### Suitability

Water, Steam, Gas, Oil, Air

### Material Combination

S.No	Description	No.	Material
1	Body	1	Cast Carbon Steel
2	Pipe Connector	2	Cast Carbon Steel
3	Body Seal	2	PTFE
4	Ball	1	Stainless Steel
5	Stem Seal	1	PTFE
6	Packing	1	PTFE
7	Stem	1	Stainless Steel
8	Gland Nut	1	Stainless Steel
9	Lever (with Plastic Sleeve)	1	Carbon Steel
10	Lever Nut	1	Stainless Steel
11	Studs & Nuts	To Suit	Alloy Steel

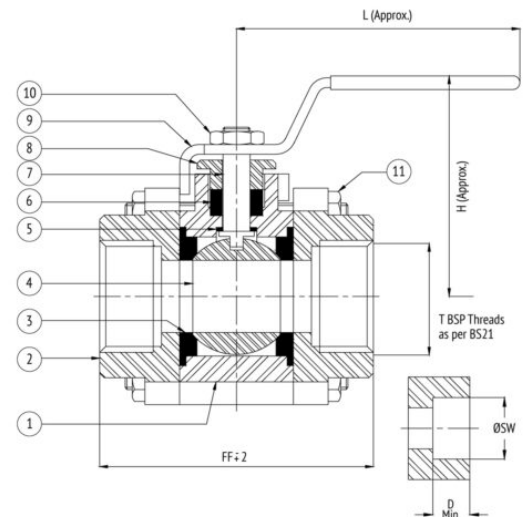

### Dimensional Data

Size (mm)	FF	LL	H	T	ØSW	D
15	66	104	55	1/2"	21.8 / 22.2	9.5
20	75	104	65	3/4"	27.2 / 27.6	12.5
25	85	135	82	1"	33.9 / 34.3	12.5
32	102	180	85	1.1/4"	42.7 / 43.1	12.5
40	115	180	94	1.1/2"	48.8 / 49.2	12.5
50	130	216	115	2"	61.2 / 61.7	16