

## AV-238 Bronze Sight Flow indicator, Screwed Ends

### Features

Body Material Cum Standard	Bronze (IBR 282 (a) (iv) Gr. B)
Product Description	Single Window with Toughened Glass
Trim	Cu-Alloy
End Details	Screwed Female BSP Taper Threads (BS-21)
Test Pressure	Body: 500 Psig (Hyd.)
Max. Working Pressure	250 Psig (Steam)
Max. Working Temperature	225°C

### Notes

Test Certificate in Form III-C as per IBR is furnished with every supply.


### Suitability

Water, Steam



### Material Combination

S.No	Description	No.	Material
1	Cover	1	Bronze
2	Gasket	1	C.A.F.
3	Glass	1	Toughened
4	Body	1	Bronze

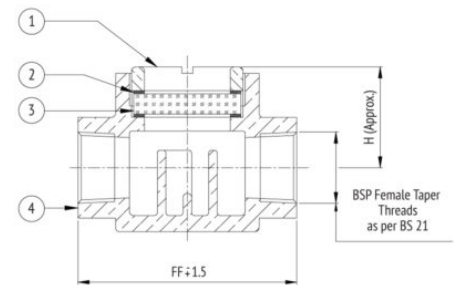

### Dimensional Data

Size (mm)	FF	H	T
15	89	40	1/2"
20	92	42	3/4"
25	102	47	1"
32	105	52	1.1/4"
40	110	55	1.1/2"
50	115	62	2"