

## IC-06 Investment Casting Stainless Steel (CF8) Globe Valve No.5, Screwed Ends, PN-20

### Features

Pressure / Class Rating	PN-20
Body Material Cum Standard	Cast Stainless Steel (ASTM A351 Gr. CF8)
Product Description	Screwed in Bonnet, Inside Screw, Rising Stem, Handwheel Operated
Type of Seat	Integral Seat
Type of Disc	Renewable Guided Disc
Trim	Stainless Steel (Type 304)
End Details	Screwed Female BSP Parallel Threads (BS-21)
Test Pressure	Body: 435 Psig (Hyd.), Seat: 320 Psig (Hyd.)
Application Medium	Food Processing

### Notes


Also available in CF8M (SS 316)  
Other screwed end specifications can be provided on request.

### Suitability

Water, Steam, Oil

### Material Combination

S.No	Description	No.	Material
1	Body	1	Cast Stainless Steel
2	Disc (Guided)	1	Stainless Steel
3	Disc Nut	1	Stainless Steel
4	Gasket	1	PTFE
5	Bonnet	1	Cast Stainless Steel
6	Packing	1	PTFE
7	Gland	1	Stainless Steel
8	Gland Nut	1	Cast Stainless Steel
9	Stem	1	Stainless Steel
10	Handwheel	1	Aluminium

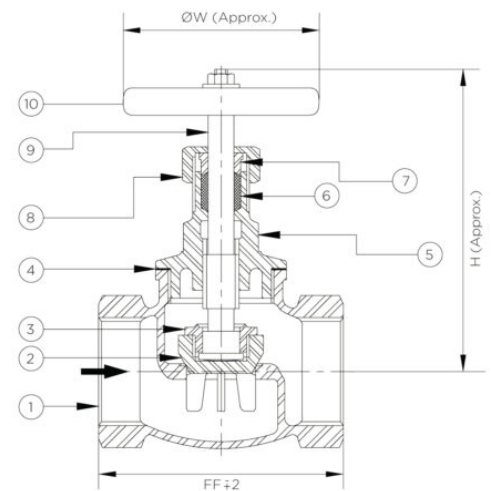

### Dimensional Data

Size (mm)	Size (inches)	FF	H	$\varnothing W$
15	1/2"	56	100	56
20	3/4"	68	115	70
25	1"	78	125	70
32	1.1/4"	87	137	89
40	1.1/2"	102	140	95
50	2"	119	162	120