

## IC-79 Investment Casting Stainless Steel (CF8) Vertical Lift Check Valve, Screwed Ends



### Features

Body Material	Cum Standard	Cast Stainless Steel (ASTM A351 Gr. CF8)
Product Description		One Piece Design, Spring Loaded, Vertical Type
Type of Seat		Integral Seat
Type of Disc		Renewable Guided Disc
Trim		Stainless Steel (Type 304) with Rubber O-Ring Facing
End Details		Screwed Female BSP Parallel Threads (BS-21)
Test Pressure		Body: 300 Psig (Hyd.), Seat: 200 Psig (Hyd.), Seat: 80 Psig (Air)



### Notes


Also available in CF8M (SS 316)  
Other screwed end specifications can be provided on request.

### Suitability

Water, Gas, Oil

### Material Combination

S.No	Description	No.	Material
1	Body	1	Cast Stainless Steel
2	Disc Guide	1	Cast Stainless Steel
3	O-Ring	1	Synthetic Rubber
4	Spring	1	Stainless Steel
5	Washer	1	Stainless Steel
6	Nut	1	Stainless Steel
7	Pin	1	Stainless Steel

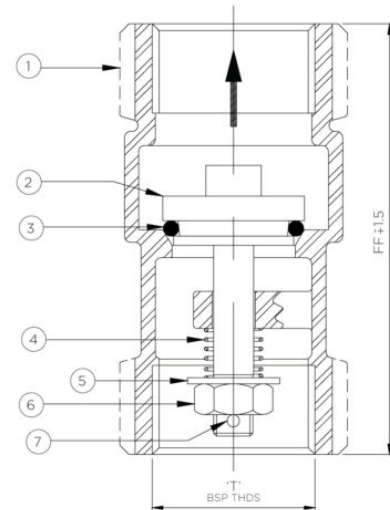

### Dimensional Data

Size (mm)	Size (inches)	FF	T
15	1/2"	65	1/2"
20	3/4"	70	3/4"
25	1"	75	1"
32	1.1/4"	85	1.1/4"
40	1.1/2"	95	1.1/2"
50	2"	103	2"