

## AV-128 Cast Iron Kinetic Type Air Release Valve, Flanged Ends

### Features

Product Standard	IS-14845
Pressure / Class Rating	PN-1.0
Body Material Cum Standard	Cast Iron (IS 210 Gr. FG 200)
Product Description	Double Ball Type
End Details	Flanged Ends as per IS:1538 PN-1.0 Flat Face (Drilled)
Test Pressure	Body: 1.5 Mpa (Hyd.), Seat: 1.0 Mpa (Hyd.)
<b>Suitability</b>	
Water, Oil	




### Material Combination

S.No	Description	No.	Material
1	Body	1	Cast Iron
2	LP Float	1	Rubber Coated Wood
3	Joint Support Ring	1	Cast Iron
4	LP Seat Ring	1	Neoprene Rubber
5	LP Cover	1	Cast Iron
6	Splash Cover	1	Cast Iron
7	HP Orifice	1	Bronze
8	HP Cover	1	Cast Iron
9	Gasket	-	Rubber
10	HP Float	1	Rubber Coated Wood / S.S.

### Dimensional Data

Size (mm)	A	B	C	ØFD	FT	k	n	Ød
15	280	211	352	165	16	125	4	19
20	305	236	373	200	21	160	4	19
25	360	280	424	220	22	180	8	19
32	487	450	674	285	23	240	8	23
40	700	506	739	340	24.5	295	8	23

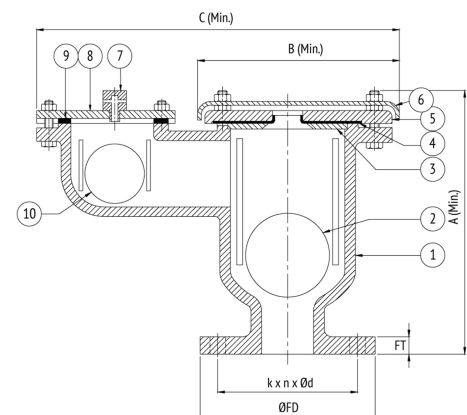

k = P.C.D  
n = No. of holes  
Ød = Diameter of holes